

REC'D 02 AUG 2004

WIPO

FST

PA 1122137

IB104/051355

US 030255

BEST AVAILABLE COPY

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office


February 03, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/529,785 ✓

FILING DATE: December 16, 2003 ✓

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

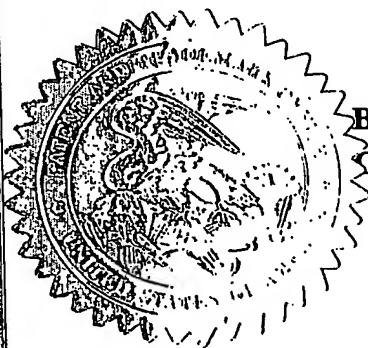

By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

P. SWAIN  
Certifying Officer

Please type a plus sign (+) inside this box → +

PTO/SB/16 (02-01)  
Approved for use through 10/31/2002. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 312 068 666

Date of Deposit: December 16, 2003

INVENTOR(S)					
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)			
SAI SHANKAR	NANGADOPALAN	TARRYTOWN, NEW YORK			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
METHOD, ACCESS POINT AND PROGRAM PRODUCT FOR PROVIDING BANDWIDTH AND AIRTIME FAIRNESS IN WIRELESS NETWORKS					
CORRESPONDENCE ADDRESS					
Direct all correspondence to:					
<input checked="" type="checkbox"/> Customer Number		24737		→ <span style="border: 1px solid black; padding: 10px 20px; font-size: 1.5em;">24737</span>	
OR Type Customer Number here					
<input type="checkbox"/> Firm or Individual Name		PHILIPS INTELLECTUAL PROPERTY & STANDARDS			
Address		P.O. BOX 3001			
Address		345 SCARBOROUGH ROAD			
City		BRIARCLIFF MANOR	State	NEW YORK	ZIP
Country		USA	Telephone	(914) 333-9608	Fax
					(914) 332-0615
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		20		<input type="checkbox"/> CD(s), Number <span style="border: 1px solid black; padding: 0 10px;"> </span>	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		4		<input type="checkbox"/> Other (specify) <span style="border: 1px solid black; padding: 0 10px;"> </span>	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.					
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:				14-1270	FILING FEE AMOUNT (\$) 160.00
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted

SIGNATURE

TYPED or PRINTED NAME

Aaron Waxler

TELEPHONE

(914) 333-9608

Date

12/16/03

REGISTRATION NO.:

46,027

(if appropriate)

Docket Number:

US030255

### USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Box 1450, Alexandria, VA 22313-1450

16152 U.S. PTO

17858 U.S. PTO  
60/529785

121603

**METHOD, ACCESS POINT AND PROGRAM PRODUCT FOR PROVIDING  
BANDWIDTH AND AIRTIME FAIRNESS IN WIRELESS NETWORKS**

In general, the present invention relates to a method, access point and program  
5 product for providing bandwidth and airtime fairness in wireless networks.  
Specifically, the present invention provides a way for a set of packets to be successively  
communicated to a wireless station from an access point while maintaining airtime and  
bandwidth fairness for other wireless stations.

10 As wireless computer technology becomes more pervasive, the need to better  
handle wireless traffic between access points and wireless stations/nodes increases.  
Specifically, in a wireless network such as a wireless local area network (WLAN), there  
are at least three types of traffic that can occur. A first type is referred to as uplink  
traffic, which refers to the transmission of content from a wireless station to an access  
15 point. A second type is referred to as downlink traffic, which refers to the transmission  
of content from an access point to a wireless station. The third type is known as  
sidelink traffic, which refers to the transmission of content from one wireless station to  
another. Particular issues arise with respect to downlink traffic from an access point to  
a wireless station. Specifically, referring to Fig. 1 an illustrative wireless network 10 is  
20 shown. As can be seen, a single access point such as access point 12 within Basic  
Service Set (BSS) 14 might have to communicate with multiple wireless stations 16A-  
C.

When communicating with a particular wireless station, ensuring adequate  
airtime and bandwidth fairness to the other stations often becomes a problem. For  
25 example, access point 12 might receive multiple streams of content from distributed

system 18, each of which is destined for a different wireless station 16A-C. Not only must access point 12 determine the order in which to transmit the streams to their respective wireless stations, but access point 12 must also be sure not to allocate too much bandwidth and airtime to one wireless station. However, given the mobile nature of wireless stations, fairness is not easily accomplished. For example, under the I.E.E.E. 802.11b standard, there are at least 4 rates of communication within a WLAN, namely, 11 Mb/s, 5.5 Mb/s, 2 Mb/s and 1Mb/s. In case of IEEE 802.11a WLAN there are 8 different physical transmission rates ranging from 6Mb/s to 54 Mb/s. Consider the IEEE 802.11b WLAN example. As a wireless station migrates or moves away from its access point, the physical rate of communication therewith will drop. This is such that wireless station 16A in close proximity to the access point 12 might receive data at the 11 Mb/s rate, while wireless station 16B that is moving away from access point 12 might only receive data at the 1 Mb/s rate. Since wireless station 16B moved away and lowered its physical transmission rate to 1Mb/s, the time to transmit its MAC frame increases by 11 times (because of lowering its transmission rate from 11Mb/s to 1Mb/s). Accordingly, during the transition time of this frame, the other wireless stations 16B-C will have to wait for a longer time before they can access the wireless medium and transfer their data frames.

Heretofore, more fairness was attempted by providing "back-off" via the CSMA/CA protocol of IEEE 802.11. Specifically, if access point 12 needed to transmit four packets to wireless station 16A, access point 12 would transmit one packet, then back-off or cease transmission for a random period of time so that other communicating wireless stations 16B-C could access the medium and transmit their frames. After the random back-off period, the second packet would be transmitted followed by another

random back-off period. This alternating of packet transmission and "back-off" would continue until all packets were transmitted.

Unfortunately, "back-off" can lead to several problems especially with packets containing audio or video content. In particular, video and audio content are typically delay sensitive meaning that they cannot tolerate delays, and are not loss sensitive meaning that they can afford to lose some of their frames. This is in contrast to data content such as email and FTP traffic, which is loss sensitive, but not delay sensitive. Thus, since "back-off" will result in delayed transmission of packets and frames, it is difficult to provide the needed Quality of Service (QoS) for audio and video types of traffic when the medium becomes heavily loaded.

Still yet, in today's IEEE 802.11 WLAN, if a packet size intended for a wireless station is too large, the access point for the wireless station will fragment the large packet into smaller packets or fragments, and then transmit the fragments while performing a random back-off with SIFS (short inter frame space) time. The reason for fragmentation of the original packet could be because the packet is too large and is likely to be in error, or if there is a likelihood of a packet collision. Thus, there would be a need to wait for the entire duration of the packet before performing a retransmission process. In this case, the original packet will be split into small fragments, which are transmitted one by one after it acquires the medium. In the header of the first fragment it will the more fragment bit to indicate to the receiver (destination wireless station) that it will receive the additional fragments. In the transmission of the last fragment, the more fragment bit will be reset to indicate that this is the last fragment. Although this current technology could allow for multiple fragments of a

single packet to be transmitted back to back, it fails to allow multiple packets to be transmitted back to back as a whole.

In view of the foregoing, there exists a need for a way to provide airtime and bandwidth fairness to wireless stations for downlink traffic without causing delayed  
5 transmission of packets or frames. Specifically, a need exists for an access point that is capable of transmitting successive packets to a single wireless station without adversely impacting traffic to other wireless stations.

In general, the present invention provides a method, access point and program  
10 product for providing bandwidth fairness and airtime fairness in wireless networks. Specifically, the present invention provides bandwidth and airtime fairness for downlink traffic. In a downlink scenario, there might be more than one stream of traffic destined for more than one destination. To initially provide bandwidth fairness, the present invention will use the concept of transmitting multiple fragments to transmit multiple  
15 packets. Specifically, the present invention will set a more fragment bit to transmit multiple packets back to back. For example, assume that there are two downlink packet streams destined to wireless stations 16A and 18B, respectively. Further assume that the individual packet size of both streams is 1000 bytes. In addition, the first stream has bandwidth requirement of 1 Mb/s and the second stream has the bandwidth requirement  
20 of 3 Mb/s. To provide bandwidth fairness, access point 12 should transmit one packet of stream 1 and three packets stream of 2 and repeat it with transmission of one packet of stream 1 and three packets of stream 2 and so on. Under the present invention, the more fragment bit of stream 2 is set to allow transmission of the three packets successively. Specifically, the more fragment bit for the first two packets of the stream,

access point 12 is set so that destination station 16B knows that there are additional packets that are going to arrive (and all three packets will arrive within the SIFS time). This achieves multiple purposes. First, other wireless stations will not attempt to access the medium because all the packets are spaced in SIFS time, and thrice the bandwidth is

5      apportioned to stream 2 compared to stream 1. Providing thrice the bandwidth for stream 2 because it requires 3 times the bandwidth of stream 1 (in the above example) is providing bandwidth fairness. In addition, this allows multiple entire packets to be transmitted back to back, which was not previously possible.

Issues of airtime fairness are raised when we consider wireless stations moving

10      towards and away from an access point. Consider the same example and assume that the wireless station 16A receiving stream 1 starts moving away from access point 12 and starts lowering its physical transmission rate from 11 Mb/s to 1 Mb/s. At this point, stream 1's packet will occupy 11 times more airtime than stream 2's packet (who is closer to access point 12) because its physical transmission rate dropped from 11Mb/s to

15      1Mb/s (The time to transmit a packet is given by the following relation:  
 $\text{Time\_to\_transmit\_packet} = \text{packet\_length} / \text{Physical\_transmission\_rate}$ ). Accordingly, the transmission times of the packets of stream 2 are shifted by 11 units of real time. This will likely result in a quality of service (QoS) violation of stream 2 as the packets may miss their "deadlines." Further, the overall throughput of the entire network is

20      lowered because one mobile station moved away and lowered its physical transmission rate. To prevent this from occurring, the present invention also provides airtime fairness. Specifically, instead of guarantying transmission of one packet of stream 1 and three packets of stream 2, the present invention provides one packet transmission time at 11Mb/s for stream 1 and three times the packet transmission time for stream 2. The

result is that if the wireless station 16A receiving stream 1 moves away from access point 12 and lowers its rate from 11Mb/s to 1Mb/s, wireless station 16A is provided with only time allocation equal to one packet transmission at 11 Mb/s. If access point 12 examines the physical transmission rate and determines that this time is not enough  
5 to transmit the packet at 1 Mb/s, it will either not transmit the packet of stream 1, or will try to fragment the packet into multiple packets/fragments to fit in the time allocated. To achieve this, an airtime counter for the stream is provided and is with the time needed to transmit this stream's packet or packets at the former transmission rate (i.e., an airtime requirement). In this example the airtime counter of stream one will be 1000 bytes/11  
10 Mb/s, and the airtime counter of stream two is set as  $3 \times 1000$  bytes/11 Mb/s.

Thereafter, successive packets or fragments of stream 1 will be transmitted by access point 12 until the time counter expires. Once the time counter expires, stream 2 will be transmitted in an identical fashion until its time counter expires. Thus, the present invention guarantees back to back packet transmission without affecting the QoS  
15 requirements of the other streams present in the network and also prevents throughput degradation in the network.

A first aspect of the present invention provides a method for providing bandwidth fairness in wireless networks, comprising: receiving a set of packets on an access point for a wireless station, setting a more fragment bit in the set of packets; and  
20 transmitting successive packets of the set of packets from the access point to a wireless station without back-off.

A second aspect of the present invention provides a method for providing airtime fairness in wireless networks, comprising: receiving a packet on an access point for a wireless station; calculating an airtime requirement for transmitting the packet to

the wireless station; setting a time counter on the access point based on the airtime requirement; and determining whether the packet can be transmitted to the wireless station before the time counter expires.

5 A third aspect of the present invention provides an access point for providing  
airtime and bandwidth fairness in wireless networks, comprising: means for calculating  
an airtime requirement for a packet received on an access point for a wireless station;  
means for setting a time counter based on the airtime requirement; and means for  
determining whether the packet can be transmitted to the wireless station before the time  
counter expires.

10 A fourth aspect of the present invention provides a program product stored on a  
recordable medium for providing airtime and bandwidth fairness in wireless networks,  
comprising: program code for calculating an airtime requirement for a packet received  
on an access point for a wireless station; program code for setting a time counter based  
on the airtime requirement; and program code for determining whether the packet can  
15 be transmitted to the wireless station before the time counter expires.

Therefore, the present invention provides a method, access point and program  
product for providing airtime and bandwidth fairness in a wireless network.

These and other features of this invention will be more readily understood from  
the following detailed description of the various aspects of the invention taken in  
20 conjunction with the accompanying drawings in which:

Fig. 1 depicts an illustrative wireless network.

Fig. 2 depicts an illustrative access point according to the present invention.

Fig. 3 depicts a first illustrative method flow diagram according to the present  
invention.

Fig. 4 depicts a second illustrative method flow diagram according to the present invention.

The drawings are merely schematic representations, not intended to portray specific parameters of the invention. The drawings are intended to depict only typical  
5 embodiments of the invention, and therefore should not be considered as limiting the scope of the invention. In the drawings, like numbering represents like elements.

In general, the present invention provides a method, access point and program product for providing airtime and bandwidth fairness in wireless networks. Specifically, to provide bandwidth fairness, a more fragment bit will be set on a packet  
10 level so that multiple packets can be successively transmitted (e.g., back to back) from an access point to a wireless station. To provide airtime fairness, upon receiving a packet destined for a wireless station, an access point will calculate an airtime requirement for transmitting the packet, and then set a time counter based on the airtime requirement. Thereafter, it will be determined whether the packet can be transmitted to  
15 the wireless station before the time counter expires. If so, the packet will be transmitted. If not, the packet will either be split into a set of fragments that are transmitted to the wireless station, or not transmitted at all.

It should be understood that in a typical embodiment, the present invention is implemented within a wireless local area network (WLAN). However, it should be  
20 appreciated that the teachings described herein could be implemented with any type of wireless network in which access points are used to communicate with wireless stations. In any even, as known, under the I.E.E.E. 802.11 standard, several "layers" are provided in a wireless network. Such layer include, among others, an application layer, a TCP layer, an IP layer, a link layer that includes an LLC layer and a MAC layer, and a

physical layer. Access points typically reside on the physical and MAC layers. As will be further described below, under the present invention, access points are configured to provide airtime and bandwidth fairness for wireless stations while allowing successive packets in a single stream to be transmitted to a particular wireless station in a back to back fashion (without "back-off").

Referring now to Fig. 2, an illustrative access point 20 according to the present invention is shown. As depicted, access point 20 fosters communication between wireless stations 22A-C within basic service set (BSS) 24 and distributed system 26. Under the present invention, access point 20 is configured to allow successive packets of downlink traffic to be transmitted to a particular wireless station (e.g., 22A) in a back to back fashion without interruption by a packet for another wireless station (e.g., 22B).

Before the present invention is described in further detail, it should be understood that access point 22A could be configured to provide this feature(s) in any known manner. To this extent, the present invention can be realized in hardware, software, or a combination of hardware and software. That is, the teachings of the present invention could be implemented through software-based or hardware-based means within access point 20. Any kind of components adapted for carrying out the methods described herein - is suited. A typical combination of hardware and software could be a component with a computer program that, when loaded and executed, carries out the respective methods described herein. Alternatively, a specific use component, containing specialized hardware for carrying out one or more of the functional tasks of the invention, could be utilized. The present invention can also be embedded in a computer program product, which comprises all the respective features enabling the implementation of the methods described herein, and which - when loaded in a

computer system - is able to carry out these methods. Computer program, software program, program, or software, in the present context mean any expression, in any language, code or notation, of a set of instructions intended to cause a system having an information processing capability to perform a particular function either directly or after  
5 either or both of the following: (a) conversion to another language, code or notation; and/or (b) reproduction in a different material form.

It should also be understood in advance Fig. 2 is intended to be illustrative only, and that access point 20, wireless stations 22A-C and/or distributed system 26 will likely contain additional components not shown. In any event, as depicted, access point  
10 20 generally includes memory 28, processor 30 for executing instructions such as program code in memory 28, and communication system 32 for communicating with distributed system 26 and wireless stations 22A-C. Memory 28 typically receives streams of downlink traffic 46A-C from distributed system 26 intended for wireless stations 22A-C that each include one or more packets 34. As shown, access point 20  
15 can receive multiple streams of downlink traffic 46A-C (e.g., three), each of can be destined for a different wireless station 22A-C, respectively. Under previous systems, access point 20 would transmit packets to a particular wireless station using the "back-off" method. For example, if multiple packets were to be transmitted to wireless station 22A, access point 20 would transmit a first packet thereto, followed by a "back-off"  
20 period during which packets could be transmitted to other wireless stations 22B-C. However, for various types of traffic such as packets containing video and audio content, the delay induced by the "back-off" period raises QoS issues. Under the present invention, access point 20 is configured to provide bandwidth fairness by allowing multiple successive packets to be routed to a single wireless station 22A-C

without the "back-off" period. The present invention is further configured to provide airtime fairness by calculating an airtime requirement for transmitting a packet to a wireless station 22A-C and then setting a time counter based on an airtime requirement. If the packet can be transmitted before the time counter expires, transmission will occur.

5 However, if the packet cannot be transmitted before the time counter expires, the packet will either not be transmitted, or will be split into a set of fragments that are separately transmitted.

Specifically, shown in memory 28 is a "fairness" program product 35 that includes stream selection system 36, airtime requirement system 38, packet splitting

10 system 40, fragment setting system 42 and counter setting system 44. When streams of downlink traffic 46A-C are received by access point 20, a channel for communicating with wireless stations 22A-C will be accessed, and stream selection system 36 will determine which stream 46A-C will be handled first. In so doing, stream selection system 36 could incorporate any known algorithm (e.g., the TWFP algorithm) for

15 determining which stream 46A-C to transmit first without violating the QoS characteristics of the other streams.

In any event, in transmitting the streams 46A-C to wireless stations 22A-C, bandwidth fairness would be provided. Specifically, assume that the packet size of each stream 46A-C is 1000 bytes. In addition, assume stream 46A and stream 46B each have

20 a bandwidth requirement of 1 Mb/s, while stream 46C has a bandwidth requirement of 3 Mb/s. To provide bandwidth fairness, access point 20 should transmit (e.g., via communication system 32) one packet of streams 46A-B and three packets stream of 46C and repeat it with one packet transmission of streams 46A-B and three packets of stream 46C and so on. Under the present invention, fragment setting system 42 would

set the more fragment bit in a MAC header accompanying stream 46C to allow transmission of three packets successively (i.e., without back-off). Specifically, the more fragment bit for the first two packets of the stream, is set so that wireless station 22A knows that there are additional packets that are going to arrive (and all three  
5 packets will arrive within the SIFS time). Thus, under the present invention, if there are "N" packets in the stream 46C, the more fragment bit of "N-1" packets will be set.

The present invention will also provide airtime fairness. As indicated above, this can especially become an issue as a wireless station (e.g., 22A) migrates away from access point 20. Thus, for example, with respect to stream 46A, airtime requirement  
10 system 38 will first determine the airtime requirement for transmitting the packets 34 in stream 46A to wireless station 22A. In general, the airtime requirement is determined based on the size of the packet(s) 34 in the selected stream 46A and the transmission rate. For example, if the stream 46A intended for wireless station 22A is comprised of one 1000 mega bit packet 34, and the rate of transmission to wireless station 22A is 5  
15 Mb/s, the total airtime requirement for transmitting packet 34 will be 200 microseconds.

Once the airtime requirement is calculated, counter setting system 44 will set/establish a time counter 50 that is based on the airtime requirement. For example, if the airtime requirement was calculated to be 200 microseconds, time counter 50 could be set for 200 microseconds. However, it should be understood that the time counter  
20 need not be set to the precise amount of the airtime requirement. Rather, time counter 50 could be set for a period of time that is longer or shorter than the calculated airtime requirement, as set forth by a predetermined set of rules or the like to ensure bandwidth and airtime fairness to the other wireless stations 22B-C is maintained. In any event, once time counter 50 is set, airtime requirement system 38 will determine whether

packet 34 can be transmitted to wireless station 22A before time counter 50 expires. If it can, communication system 32 will transmit packet 34 thereto.

However, if packet 34 cannot be transmitted to wireless station 22A before time counter 50 expires, packet splitting system 40 will split packet 34 into a set of  
5 fragments. In a typical embodiment, the packet will be split into equal fragments. For example, the 1000 mega bit packet 34 could be spit into a set of ten 100 mega bit fragments, into a set of five 200 mega bit fragments, etc. Moreover, if the original stream 46A intended for wireless station 22A included more than one packet 34, each such packet 34 could be split in a similar manner. In any event, once the packet(s) 34  
10 have been split into a set of fragments, communication system 32 can begin communicating the set of fragments. To this extent, the set of fragments may or may not be transmitted back to back in a manner similar to the transmission of multiple packets as described above.

It should be understood that Fig. 2 depicts a software-based implementation of  
15 the present invention for illustrative purposes only. Specifically, the underlying functionality of the present invention was shown and described in Fig. 2 as being performed by program code within access point 20. However, this need not be the case as the same functionality could be provided through hardware (or a combination of software and hardware).

20 Referring now to Fig. 3, a method 100 for providing bandwidth fairness according to the present invention is shown. As depicted, first step S1 of method 100 is to receive a set of packets on an access point. Second step S2 is to set a more fragment bit in the set of packets. Third step S3 is to transmit successive packets of the set of packets from the access point to a wireless station without back-off.

Referring now to Fig. 4, a method 200 according to the present invention is depicted. As shown, first step D1 of method is to receive a packet on an access point for a wireless station. Second step D2 is to calculate an airtime requirement for transmitting the packet to the wireless station. Third step D3 is to set a time counter on the access point based on the airtime requirement. Fourth step D4 determine whether the packet can be transmitted to the wireless station before the time counter expires. If the packet can bet transmitted to the wireless access point before the time counter expires, it will be transmitted in step D5. If, however, transmission cannot occur before the time counter expires, the packet will be split into a set of fragments in step D6.

10       The foregoing description of the preferred embodiments of this invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed, and obviously, many modifications and variations are possible. Such modifications and variations that may be apparent to a person skilled in the art are intended to be included within the scope of  
15   this invention as defined by the accompanying claims.

CLAIMS

1. A method (100) for providing bandwidth fairness in wireless networks, comprising:  
receiving a set of packets (46C) on an access point (20) for a wireless station  
(46C);  
5        setting a more fragment bit of the set of packets (46C); and  
transmitting successive packets of the set of packets from the access point (20)  
to the wireless station (46C) without back-off.
2. The method (100) of claim 1, wherein the step of setting the more fragment bit,  
10        comprises setting the more fragment bit in a MAC header accompanying the set of  
packets (46C) to a value of 1.
3. The method (100) of claim 1, wherein the set of packets (46C) comprises a plurality  
of packets.  
15
4. The method (100) of claim 1, wherein the more fragment bit is not set in a last of the  
set of packets (46C) to be transmitted.
5. A method (200) for providing bandwidth and airtime fairness in wireless networks,  
20        comprising:  
receiving a packet (34) on an access point (20) for a wireless station (22A);  
calculating an airtime requirement for transmitting the packet (34) to the  
wireless station (22A);

setting a time counter (50) on the access point (20) based on the airtime requirement; and

determining whether the packet (34) can be transmitted before the time counter (50) expires.

5

6. The method (200) of claim 5, further comprising transmitting the packet to the access point.

7. The method (200) of claim 5, further comprising splitting the packet (34) into a set of  
10 fragments (48) if the packet (34) cannot be transmitted before the time counter (50) expires.

8. The method (200) of claim 7, further comprising transmitting the set of fragments (48) until the time counter (50) expires.

15

9. The method (200) of claim 7, wherein the splitting step comprises splitting the packet (34) into equal sub-packets to yield a set of fragments (48).

10. The method (200) of claim 5, wherein the airtime requirement is calculated based on  
20 a size and a transmission rate of the packet.

11. An access point (20) for providing airtime and bandwidth fairness in wireless networks, comprising:

means for calculating (38) an airtime requirement for a packet (34) received on an access point (20) for a wireless station (22A);

5 means for setting (44) a time counter (50) based on the airtime requirement; and  
means for determining (38) whether the packet (34) can be transmitted to the wireless station (22A) before the time counter (50) expires.

12. The access point (20) of claim 11, further comprising means for communicating (32) the packet (34) if the packet (34) can be transmitted to the wireless station (22A) before the time counter (50) expires.

13. The access point (20) of claim 11, further comprising means for splitting (40) the packet (34) into a set of fragments (48) if the packet (34) cannot be transmitted to the  
15 wireless station (22A) before the time counter (50) expires.

14. The access point (20) of claim 13, wherein the means for splitting (40) the packet (34) splits the packet (34) into equal sub-packets to yield the set of fragments (48).

20 15. The access point (20) of claim 11, the airtime requirement is calculated based on a size and a transmission rate of the packet (34).

16. The access point (20) of claim 11, wherein the access point (20) is a wireless access point (20) implemented within a wireless local area network.

17. A program product (35) stored on a recordable medium for providing airtime and bandwidth fairness in wireless networks, which when executed, comprises:

program code for calculating (38) an airtime requirement for a packet (34) received on an access point (20) for a wireless station (22A);

5 program code for setting (44) a time counter (50) based on the airtime requirement; and

program code for determining (38) whether the packet (34) can be transmitted to the wireless station (22A) before the time counter (50) expires.

10 18. The program product (35) of claim 17, further comprising program code for communicating (32) the packet (34) if the packet (34) can be transmitted to the wireless station (22A) before the time counter (50) expires.

19. The program product (35) of claim 17, further comprising program code for splitting  
15 (40) the packet (34) into a set of fragments (48) if the packet (34) cannot be transmitted to the wireless station (22A) before the time counter (50) expires.

20. The program product (35) of claim 19, wherein the program code for splitting (40) the packet (34) splits the packet (34) into equal sub-packets to yield the set of fragments  
20 (48).

21. The program product (35) of claim 17, the airtime requirement is calculated based on a size and a transmission rate of the packet (34).

22. The program product (35) of claim 17, wherein the program product (35) is implemented on an access point (20) that is implemented within a wireless local area network.

5

10

15

20

## ABSTRACT

The present invention provides a method (100), access point (20) and program product (35) for providing airtime and bandwidth fairness in wireless networks. To provide bandwidth fairness, a more fragment bit is set in a set of packets (46C) received  
5 by an access point (20) so that the packets of the set of packets (46C) can be transmitted to its destination (46C) successively (i.e., without back-off). To provide airtime fairness, upon receiving a packet (34) destined for a wireless station (22A), the access point (20) will calculate an airtime requirement for transmitting the packet (34), set a time counter (50) based on the airtime requirement. Thereafter, it will be determined  
10 whether the packet (34) can be transmitted to wireless station 22A before the time counter (50) expires. If not, transmission of the packet (34) will either not occur, or the packet (34) will be split into a set of fragments (48) for transmission.

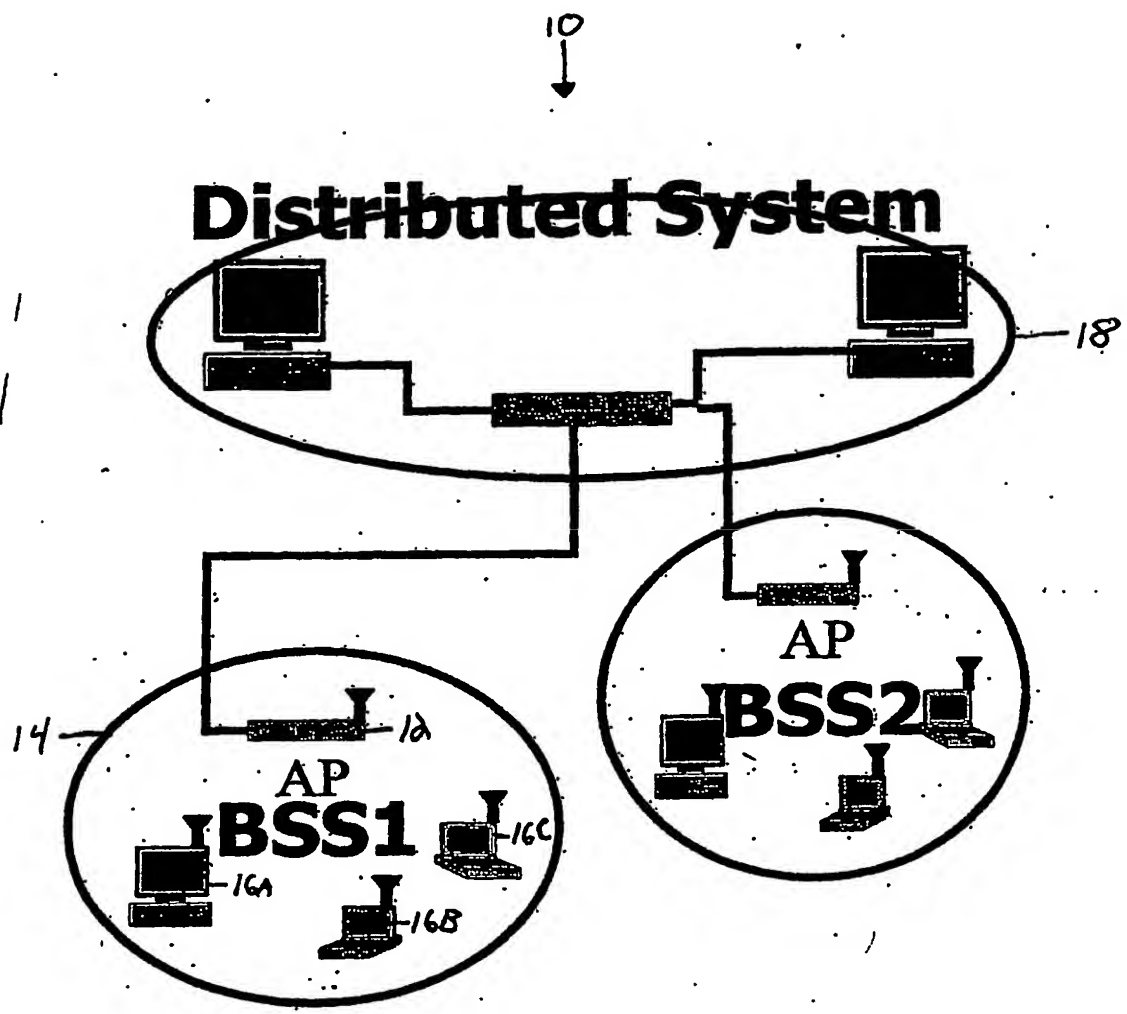


FIG. 1

BEST AVAILABLE COPY

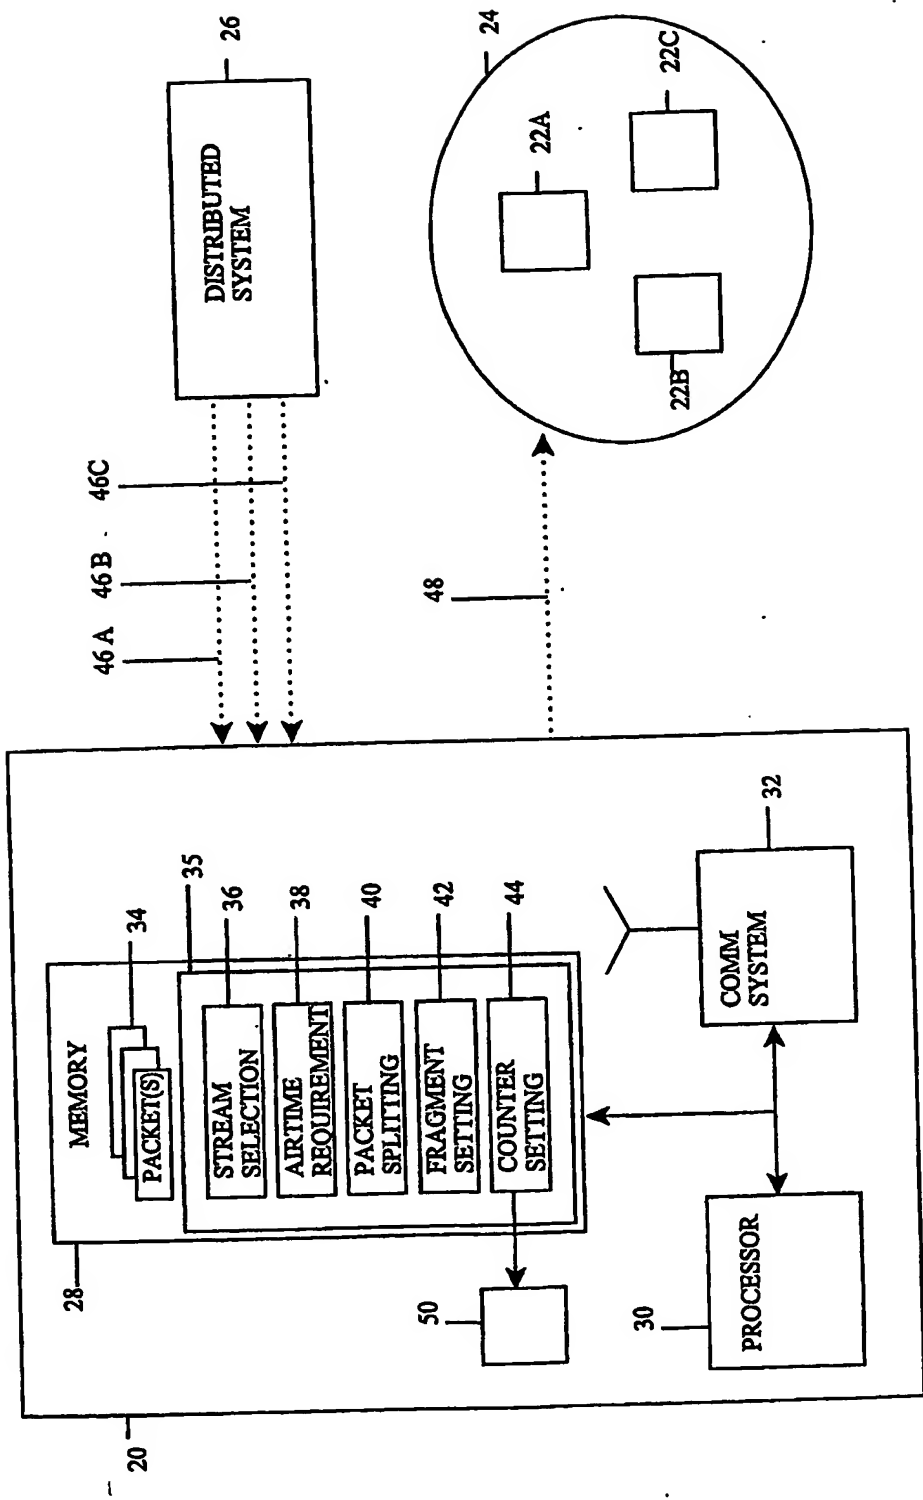


FIG. 2

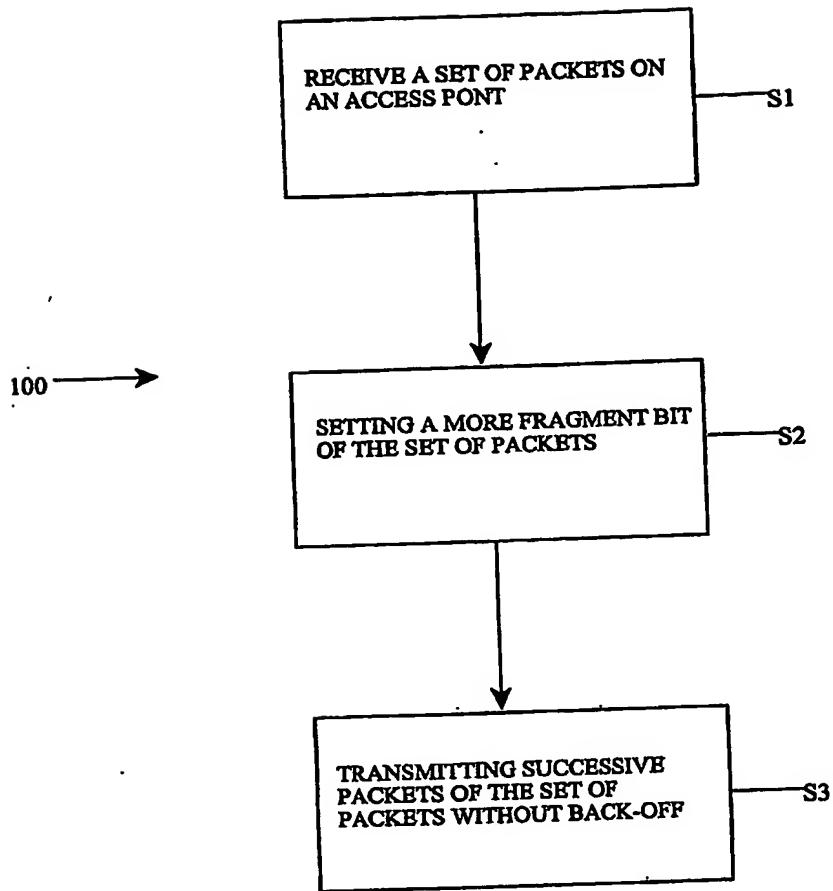


FIG. 3

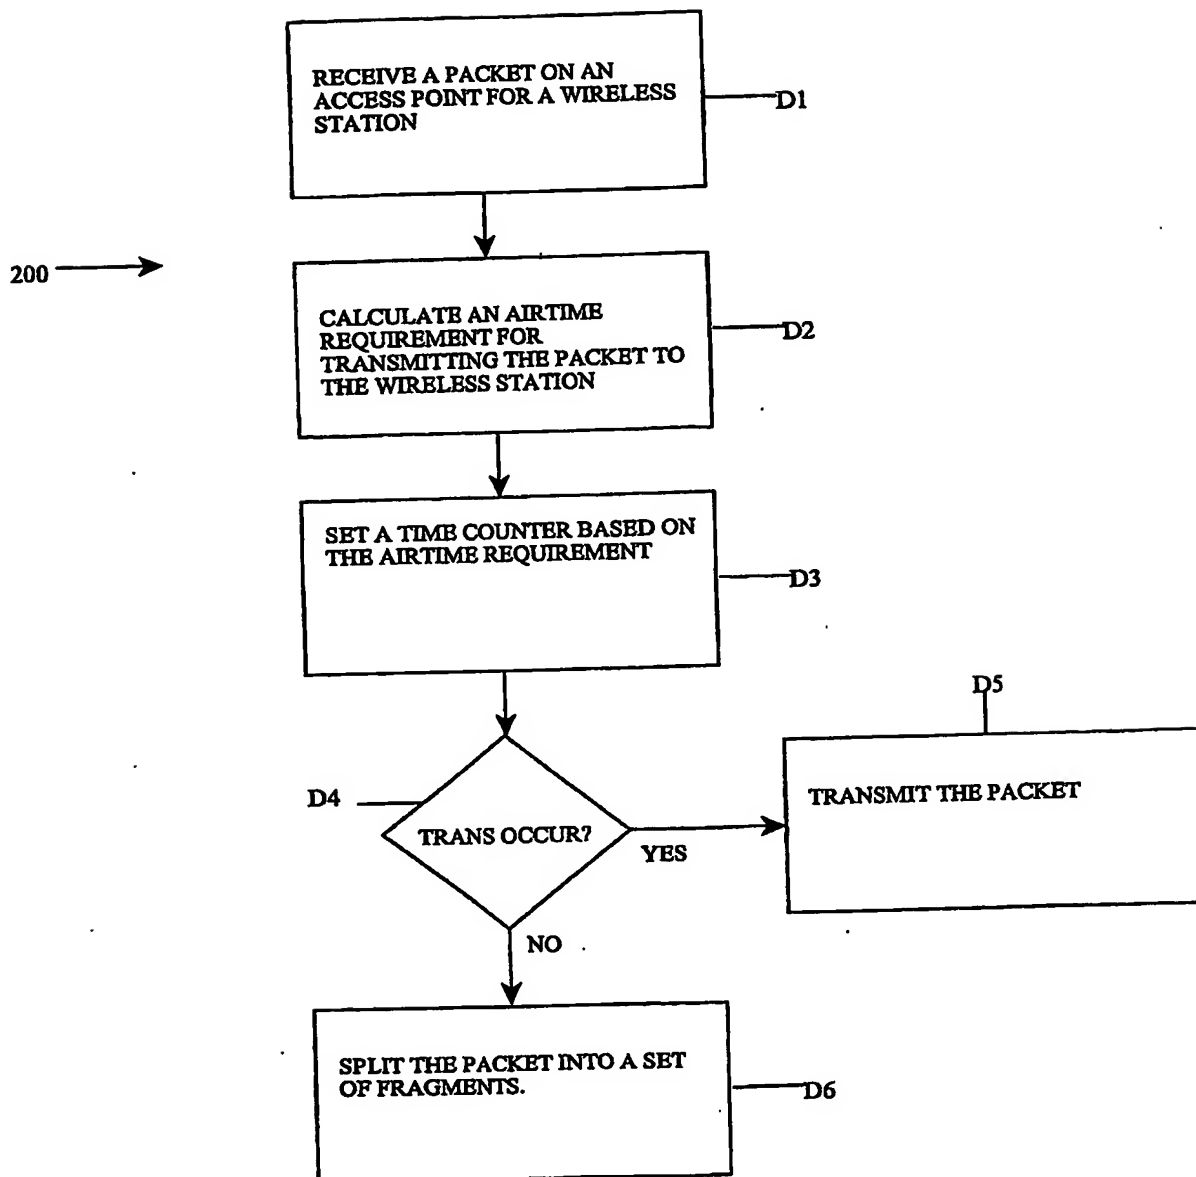


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**